

SW-30 Exit Verifier

The SW-30's modular design and intelligent engineering make it the industry's most reliable ticket receiving/payment device. This user friendly device processes paid/unpaid tickets and accommodates monthly cardholders with a TFT display and intercom for communication with patrons. TIBA's logical design allows for the addition of AVI, hotel room key and barcode readers without costly up-charges or additional devices in the lane.


TIBA's engineers succeeded to create a simple and reliable design. The unit consists of an off-the-shelf receipt printing/ticket scanning/transport device, power supply, bill acceptance/dispensing components, main board, I/O board and display. When changing receipt paper the interior of the unit conveniently slides out for easy access. Also there is a convenient access panel to remove the processed tickets without taking the machine out of operation. Additionally all TIBA products have on-board communications isolators.

Standard:

- Motorized barcode reader to scan and ingest tickets
- Magnetic card reader to accept credit cards, debit cards and hotel room keys
- Receipt printer
- Proximity reader for monthly parkers
- TFT display
- Build in Intercom
- Communications line surge protector
- Stainless steel construction.




Optional:

- Analog, digital or VOIP intercom optional
- Magnetic card reader for hotel guests, value cards and credit card users

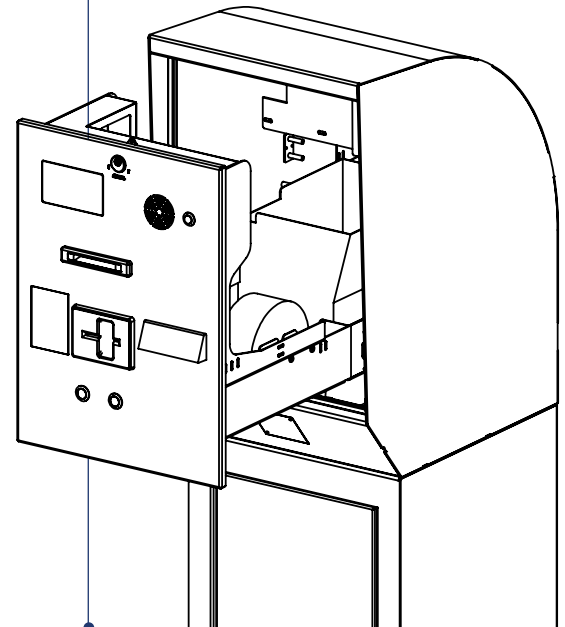

ATLANTA, GEORGIA U.S.A.
5126 South Royal Atlanta Drive
Tucker, Georgia 30084
U.S.A.
770.491.7586 Phone
770.934.3384 Fax
www.tibaparking.com

SW-30 Exit Verifier

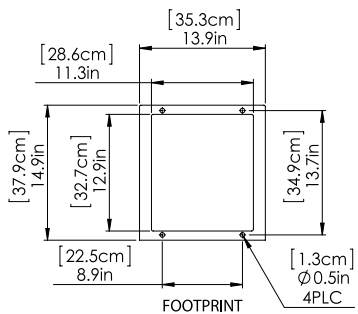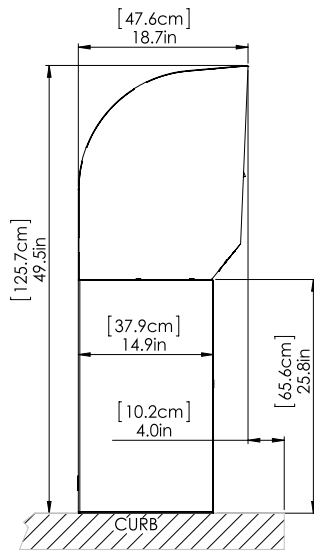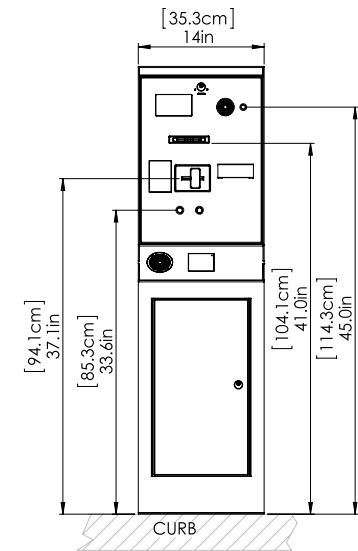

Features

Ticket Verifier	Motorized barcode scanner
Monthlies/Employees	Access via proximity card, magnetic stripe cards, AVI, barcode or keypad
Credit Card Reader	Standard
Receipt Printer	Standard
Single Channel Loop Detector	Standard
Customer Display	Standard: TFT display
Intercom	Optional: Analog, digital or VOIP intercom
Surge Protection	Built in data-line surge protector
Hotel or Congress Ticket	Optional

Operation

Processor	Embedded industrial controller
Communication & Network	RS-485 industrial communication or TCP/IP ethernet communication
Clock	Built in, backed up by lithium ion battery; keeps clock and data for up to 10 years
Off-Line Operation	Full off-line mode enabled
Management Monitoring	Transaction and all events monitored on-line

Housing – Stainless Steel

Measurements	14" (35.3 cm) width; 18.7" (47.6 cm) depth; 49.5" (125 cm) height
Weight	127 Lbs. (57 KG)
Color (Housing)	Standard: White RAL 9010 Optional: Custom colors available
Locks	Two separate locks for maintenance and to empty ticket container

Electrical

Voltage	100-240V AC 50-60 HZ
Current	5.3A max. with heater
Power Consumption	650W with heater
Operating Voltage	24V DC

Environmental Conditions

Operating Temperature	-4° to 122° F (-20° to 50° C) with heater
IP Rating	54

Regulatory



- Safety • UL 60950-1:2007
• CAN/CSA-C22.2 No. 60950-1-07
- EMC • FCC Part 15, Subpart B, Class B
• CE



Subject to design and functionality changes until product shipping.